

REQUIREMENTS/LAYOUT AND DRAWINGS


LOT#2: JOGGING TRACK

	Walking Track	UNIT	Qty
1	Excavation		
	Excavation for foundation of columns etc. up to any depth and lead including dewatering if required, back filling of excavated earth in foundation trenches and spreading the surplus earth and removing extra earth and debris from site at any lead and lift, complete as shown on drawings, and as directed by Consultant including making provision for shoring of loose soil if required and removal of excavated earth up to 5'0" from edge of excavation complete as per drawing and as directed by Engineer/in charge	CFT	13779.5
2	Lean Concrete (1:4:8)		
	Providing and laying Machine mixed cement concrete bed in excavated foundations 1:4:8 (1 cement 4 sand 8 crushed stone) 19mm and down gauge complete with leveling ramming watering and curing, as directed by Engineer/in charge	CFT	4547.235
3	Earth Compaction		
	Compaction of earthwork in embankment to full depth and width by approved mechanical means in layer not exceeding 10 inches (230mm) in depth at optimum moisture content including watering by mechanical means.	CFT	2204.72
4	Cement Concrete (1:2:4)		
	Providing and laying 1:2:4 cement concrete using approved coarse sand and crushed aggregate 3/4" (19mm) and down gauge in precast shelves coping, cornices, eave boards, hood, fencing posts and manhole covers etc. including formwork & its removal, compacting and curing in ground floor as directed by the Engineer.	CFT	4133.85
5	Kerb Blocks for Walking Track		

REQUIREMENTS/LAYOUT AND DRAWINGS

	Providing and laying road kerb of precast cement concrete(1:3:6) having dimensions 24"x6"x12" (600mm x150mm x300mm) using crushed aggregate, formwork and its removal, compacting and curing laid in cement mortar 1:4 & cement plaster 1:4 neatly finished including cost of excavation, backfilling of excavated stuff & its disposal within 30m as directed by the Engineer	RFT	2755.9
6	G.I Poles		
	Providing G.I Pipes of 3" dia having 16 gauge specials and clamps etc., including fixing cutting and fitting complete with and including the cost of breaking through walls and roof, making good etc., painting 2 coats after cleaning the pipe etc., with white zinc paint with pigments to match the color of building as per direction given by the Engineer.	RFT	120
7	Asphaltic and Syntetic Track		
	Asphaltic pavement and Syntetic Track t works.	SFT	13779.5
8	Poles Lights		
	Supply and install Pole mounted weatherproof LED 50 Watt fixture including accessories, installation materials. Philips or approved equivalent	No	10

LOT#03
REQUIREMENTS/LAYOUT AND DRAWINGS

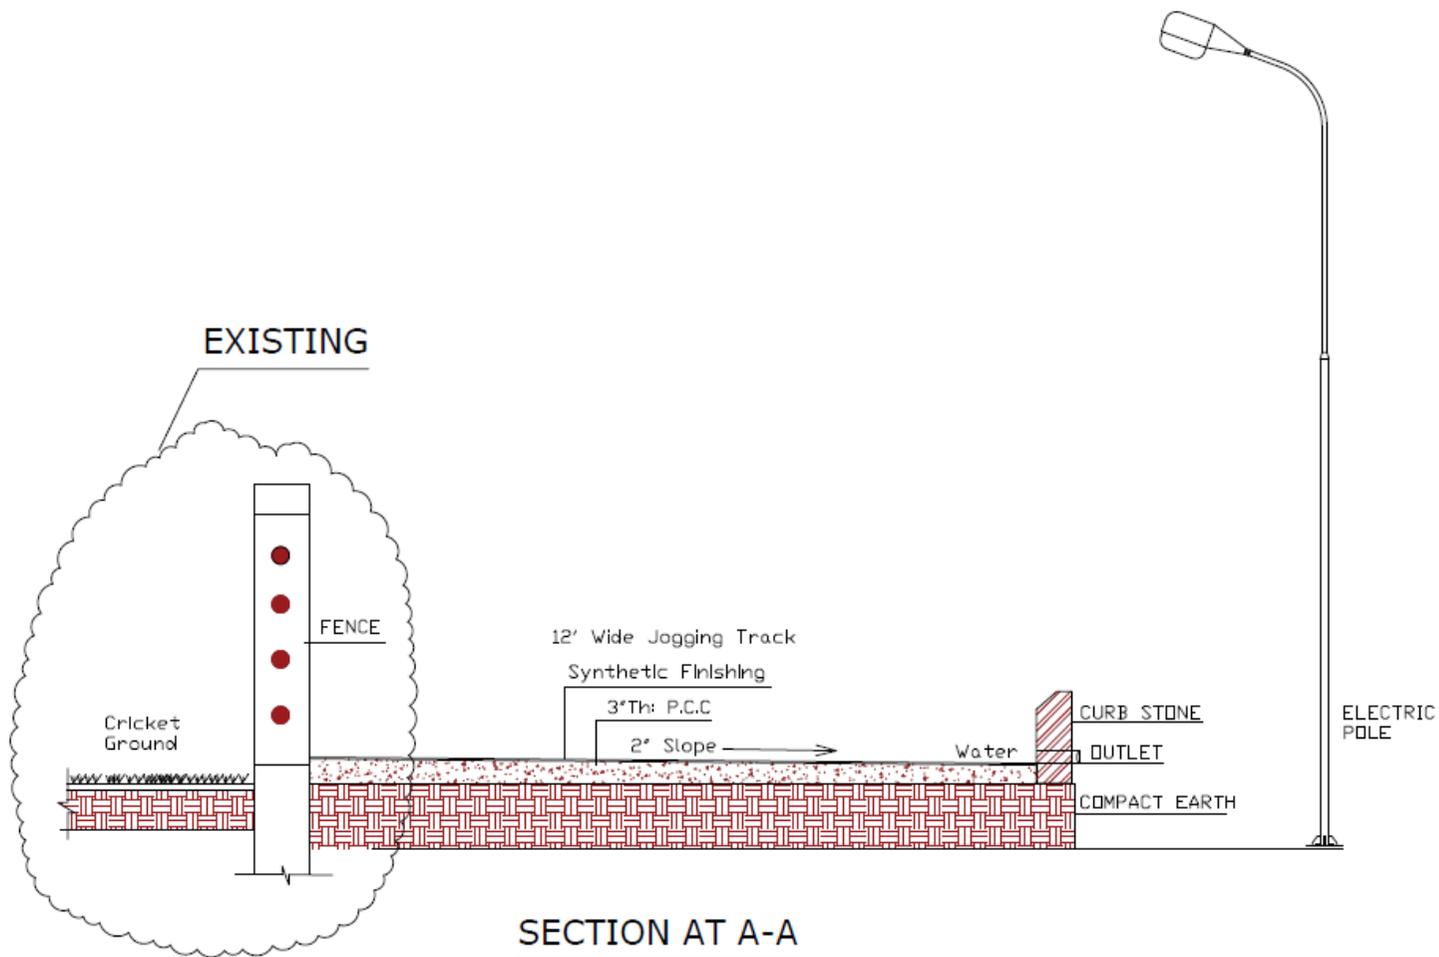

LOT#03
REQUIREMENTS/LAYOUT AND DRAWINGS

